


**SPECIFICATIONS**

Ratings:	50mA @ 12 VDC
Electrical Life:	300,000 cycles typical
Contact Resistance:	10mΩ max., typical @ 2-4 VDC, 100mA
Insulation Resistance:	1,000MΩ min.
Dielectric Strength:	>1,000 Vrms at sea level
Operating Force:	300 ± 50 gf

**MATERIALS**




Housing:	6/6 Nylon
Cover:	Polycarbonate (PC)
Lens:	Polycarbonate (PC)
Terminals:	Silver plated copper alloy
Contacts:	Silver plated phosphor bronze

HOW TO ORDER

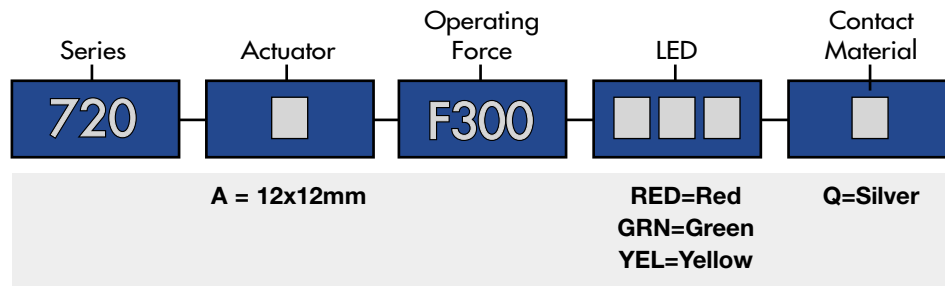


Distributed by: Electro-Stock [www.electrostock.com](http://www.electrostock.com) Ph 630-876-8552 Fax 653-876-1166

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

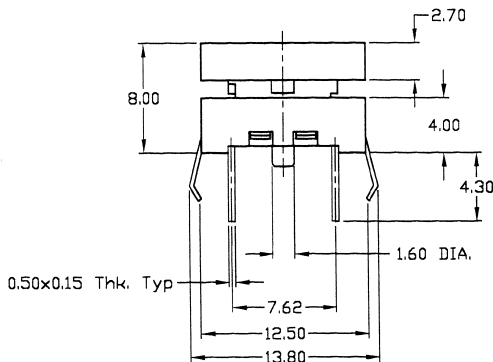

P.C. MOUNTING



Schematic

