

ELECTRICAL SPECIFICATIONS:

- |   |                              |   |                  |
|---|------------------------------|---|------------------|
| 1.0 TURNS RATIO (P6-P5-P4) :                        | (J6-J3)                      | : 1CT : 1CT ± 3%                          |                  |
|   | (P3-P2-P1) :                 | (J2-J1)                                   | : 1CT : 1CT ± 3% |
| 2.0 INDUCTANCE (P6-P4)                              |                              | : 350uH MIN. @ 0.1V , 100KHz, 8mA DC Bias |                  |
|   | (P3-P1)                      | : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias  |                  |
| 3.0 LEAKAGE INDUCTANCE P6-P4 (WITH J6 AND J3 SHORT) |                              | : 0.3 MAX. @ 1MHz                         |                  |
|   | P3-P1 (WITH J2 AND J1 SHORT) | : 0.3 MAX. @ 1MHz                         |                  |
| 4.0 INTERWINDING CAPACITANCE (P6,P5,P4) TO (J6,J3)  |                              | : 30pF MAX @ 1MHz                         |                  |
|   | (P3,P2,P1) TO (J2,J1)        | : 30pF MAX. @ 1MHz                        |                  |
| 5.0 DC RESISTANCE (J6-J3)=(J2-J1)                   |                              | : 1.2 ohms Max.                           |                  |

NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

InNet Technologies inc.  
<http://www.innet-tech.com>  
 Stewart Connector Systems  
<http://www.stewartconnector.com>

SHEET  
1 OF 4

DRAWING NO. SI-40138 REV. 07

6.0 RETURN LOSS:  $(P6-P4)=100 \text{ OHMS}$  AND  $(P1-P3)=100 \text{ OHM REF.}$   
1MHz TO 30MHz : 18dB MIN.  
60MHz TO 80MHz : 12dB MIN.

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).

7.0 VOLTAGE WITHSTAND:  
(J1, J2) TO (P1, P3) : 1500 VAC  
(J3, J6) TO (P4,P6) : 1500 VAC

8.0 INSERTION LOSS:  $RS=RL=100 \text{ ohms}$   
100KHz TO 100MHz 1.1 dB TYP

9.0 RISE TIME:  $RS=100 \text{ OHMS}$  AND  $RL = 100 \text{ OHMS}$   
OUTPUT VOLTAGE = 1 V peak 3.0 nS MAX  
PULSE WIDTH= 112nS 3.0 nS MAX

10.0 CROSS TALK:  
1MHz TO 100MHz 40 dB TYP


11.0 COMMON TO COMMON MODE ATTENUATION:  
30MHz TO 100MHz 35dB TYP

InNet Technologies inc.  
<http://www.innet-tech.com>  
Stewart Connector Systems  
<http://www.stewartconnector.com>


SHEET  
2 OF 4

DRAWING NO. SI-40138 REV. 07




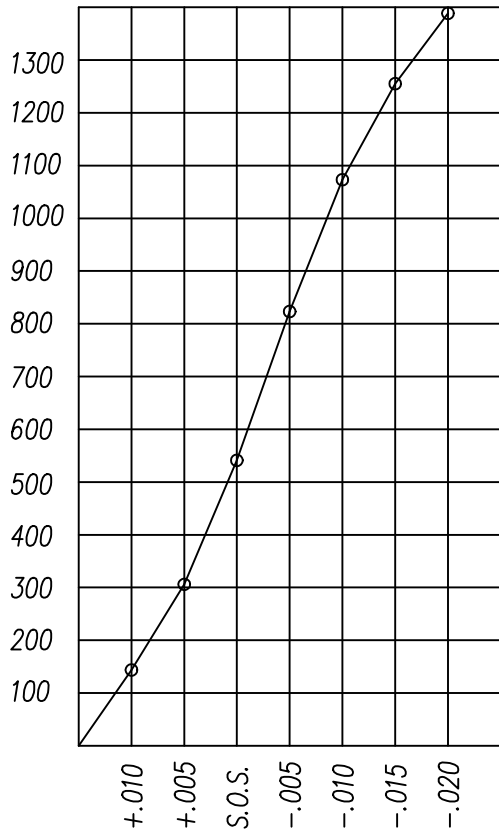

PANEL GROUNDING BEAM DEFLECTION  
S.O.S. = SUGGESTED OPENING SIZE

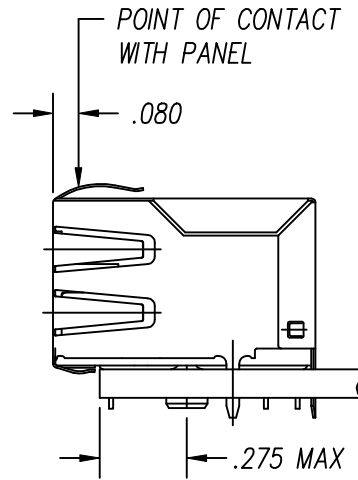

THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY. THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES. FORCE VALUES ON THE GRAPH ARE GENERAL AVERAGES TAKEN AT THE POINT OF CONTACT SHOWN ABOVE. THE SUGGESTED PANEL OPENING INCLUDES APPROXIMATELY .020 CLEARANCE ON THE SIDES AND TOP AND .013 ON THE BOTTOM, AT PANEL OPENING.

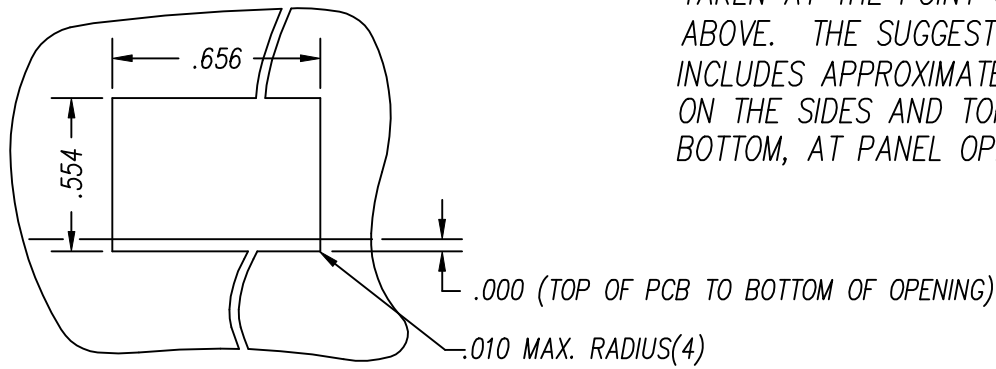

SUGGESTED PANEL OPENING

CT720034X1/24-001302

<p>InNet Technologies inc.  <a href="http://www.innet-tech.com">http://www.innet-tech.com</a>  <b>Stewart Connector Systems</b>  <a href="http://www.stewartconnector.com">http://www.stewartconnector.com</a></p>		
<p>SHEET 4 OF 4</p>	<p>DRAWING NO. SI-40138</p>	<p>REV. 03</p>